


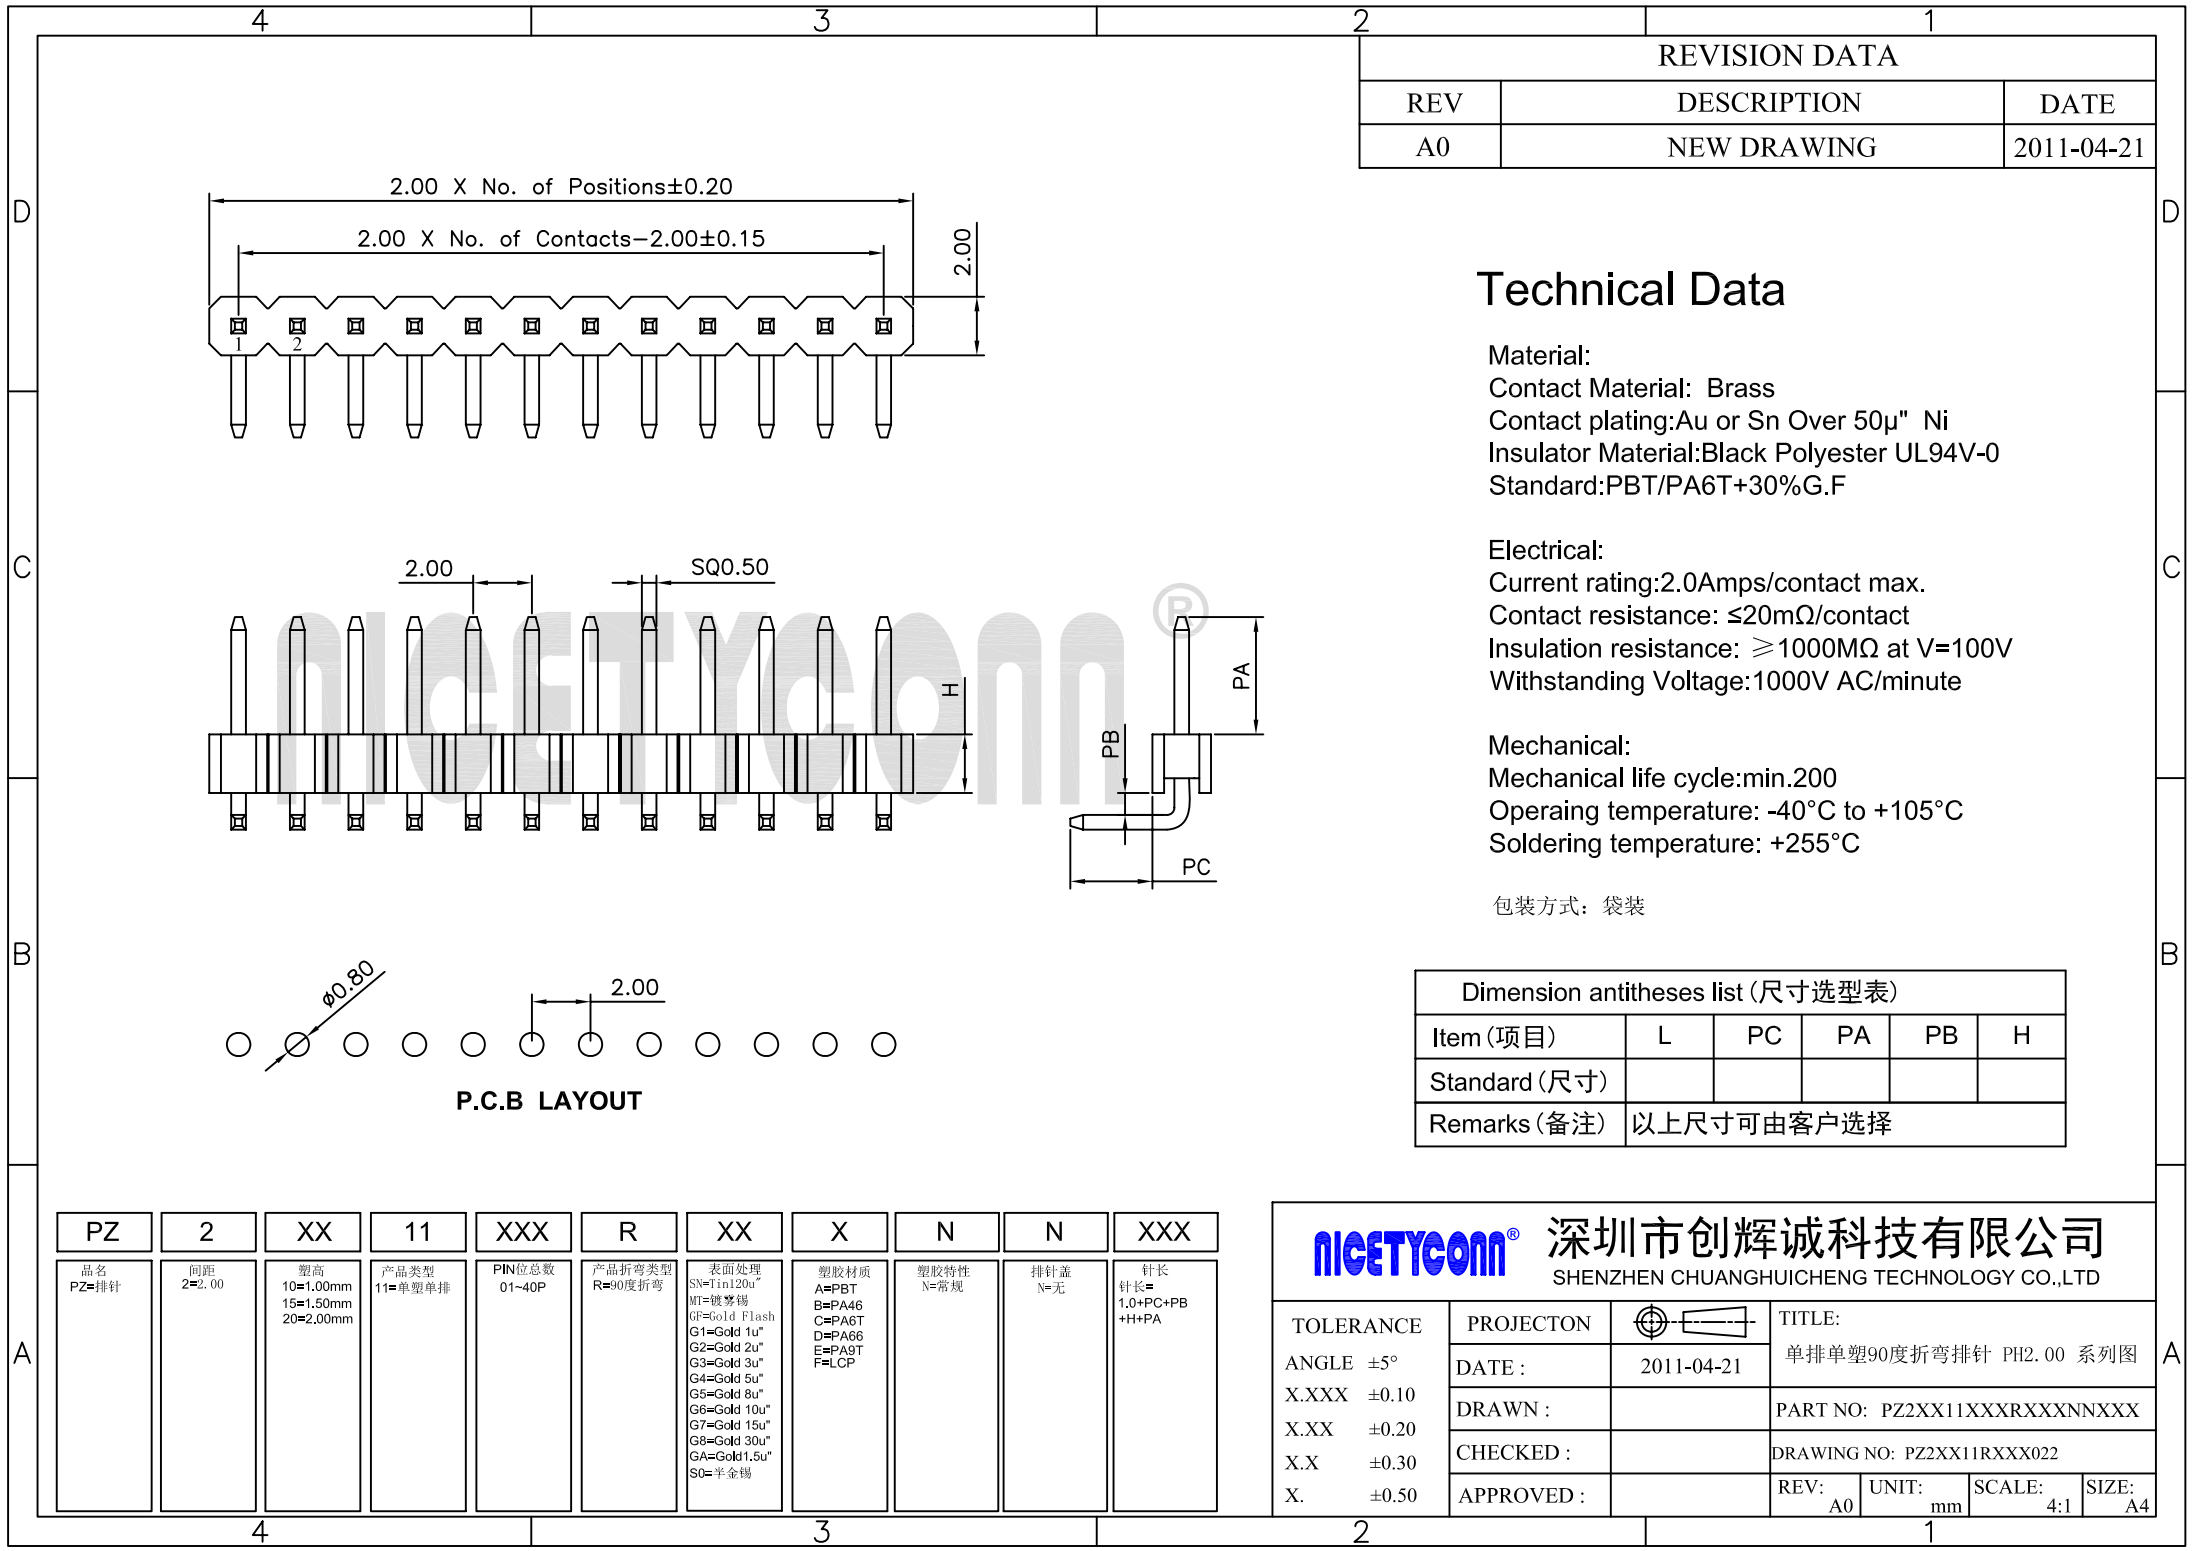

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2011-04-21

Technical Data

Material:
Contact Material: Brass
Contact plating: Au or Sn Over 50μ" Ni
Insulator Material: Black Polyester UL94V-0
Standard: PBT/PA6T+30%G.F

Electrical:
Current rating: 2.0Amps/contact max.
Contact resistance: ≤20mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Withstanding Voltage: 1000V AC/minute

Mechanical:
Mechanical life cycle: min.200
Operating temperature: -40°C to +105°C
Soldering temperature: +255°C

包装方式: 袋装

Dimension antitheses list (尺寸选型表)					
Item (项目)	L	PC	PA	PB	H
Standard (尺寸)					
Remarks (备注)	以上尺寸可由客户选择				

PZ	2	XX	11	XXX	R	XX	X	N	N	XXX
品名 PZ=排针	间距 2=2.00	塑高 10=1.00mm 15=1.50mm 20=2.00mm	产品类型 11=单塑单排	PIN位总数 01~40P	产品折弯类型 R=90度折弯	表面处理 SN=Tin120u" NI=镀镍锡 G1=Gold Flash G2=Gold 1u" G3=Gold 2u" G4=Gold 3u" G5=Gold 5u" G6=Gold 8u" G7=Gold 10u" G8=Gold 15u" G9=Gold 30u" GA=Gold 1.5u" S0=半金锡	塑胶材质 A=PBT B=PA46 C=PA6T D=PA66 E=PA9T F=LCP	塑胶特性 N=常规	排针盖 N=无	针长 针长= 1.0+PC+PB +H+PA

TOLERANCE					PROJECTON		TITLE:	
ANGLE	±5°				DATE :	2011-04-21	单排单塑90度折弯排针 PH2.00 系列图	
X.XXX	±0.10				DRAWN :		PART NO: PZ2XX11XXXRXXXNXXX	
X.XX	±0.20				CHECKED :		DRAWING NO: PZ2XX11RXXX022	
X.X	±0.30				APPROVED :		REV: A0	UNIT: mm
X.	±0.50						SCALE: 4:1	SIZE: A4

nicetyconn® 深圳市创辉诚科技有限公司
SHENZHEN CHUANGHUICHENG TECHNOLOGY CO.,LTD