


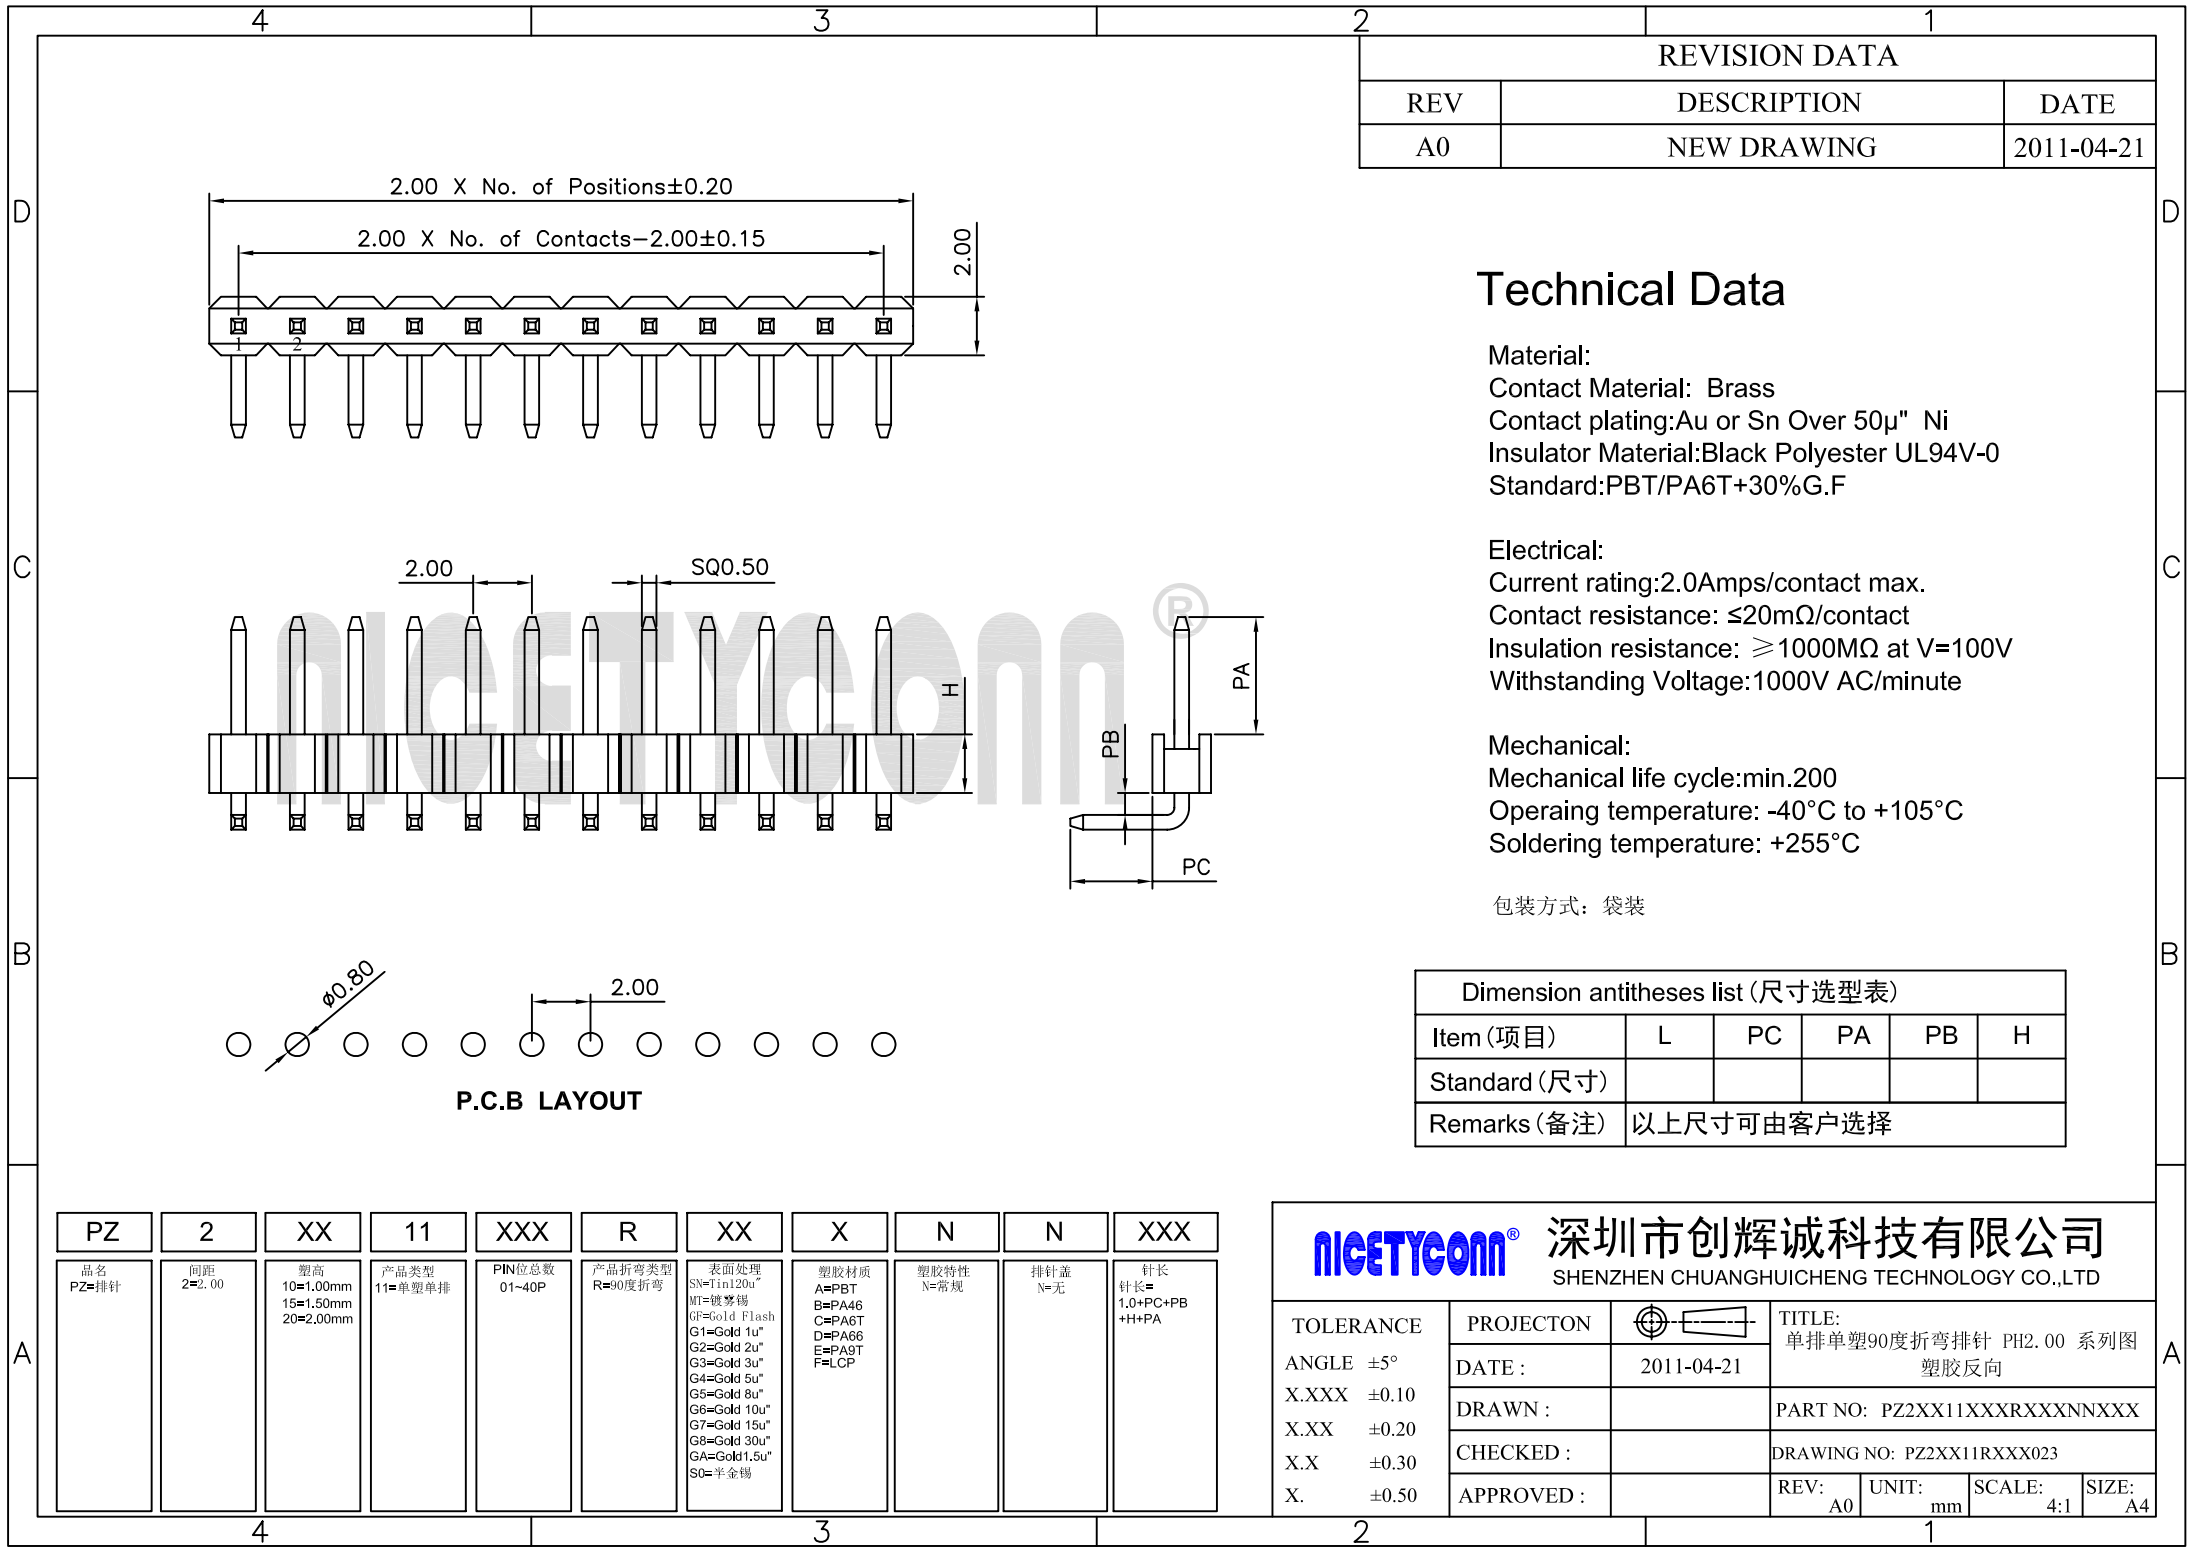

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2011-04-21

Technical Data

Material:
Contact Material: Brass
Contact plating: Au or Sn Over 50μ" Ni
Insulator Material: Black Polyester UL94V-0
Standard: PBT/PA6T+30%G.F


Electrical:
Current rating: 2.0Amps/contact max.
Contact resistance: ≤20mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Withstanding Voltage: 1000V AC/minute

Mechanical:
Mechanical life cycle: min.200
Operating temperature: -40°C to +105°C
Soldering temperature: +255°C

包装方式: 袋装

Dimension antitheses list (尺寸选型表)					
Item (项目)	L	PC	PA	PB	H
Standard (尺寸)					
Remarks (备注)	以上尺寸可由客户选择				

PZ	2	XX	11	XXX	R	XX	X	N	N	XXX
品名 PZ=排针	间距 2=2.00	塑高 10=1.00mm 15=1.50mm 20=2.00mm	产品类型 11=单塑单排	PIN位总数 01~40P	产品折弯类型 R=90度折弯	表面处理 SN=Tin120u" WI=镀锡 GI=Gold Flash G1=Gold 1u" G2=Gold 2u" G3=Gold 3u" G4=Gold 5u" G5=Gold 8u" G6=Gold 10u" G7=Gold 15u" G8=Gold 30u" GA=Gold 1.5u" S0=半金锡	塑胶材质 A=PBT B=PA46 C=PA6T D=PA66 E=PA9T F=LCP	塑胶特性 N=常规	排针盖 N=无	针长 针长= 1.0+PC+PB +H+PA

NICETYCOMM® 深圳市创辉诚科技有限公司 SHENZHEN CHUANGHUICHENG TECHNOLOGY CO.,LTD				
TOLERANCE	PROJECTON		TITLE: 单排单塑90度折弯排针 PH2.00 系列图 塑胶反向	
ANGLE ±5°	DATE :	2011-04-21	PART NO: PZ2XX11XXXRXXXNXXX	
X.XXX ±0.10	DRAWN :		DRAWING NO: PZ2XX11RXXX023	
X.XX ±0.20	CHECKED :		REV: A0 UNIT: mm SCALE: 4:1 SIZE: A4	
X.X ±0.30	APPROVED :			
X. ±0.50				